



water for wellness

# WS 9000CT Water Cooler

- ✿ LG parts and components
- ✿ Touch-activated sensor operation
- ✿ Innovative design and technology
- ✿ Stainless steel reservoirs
- ✿ Enhanced alkalinity\*
- ✿ State-of-the-art filtration\*
- ✿ Nutrient boost from added minerals\*
- ✿ Built-in leak detection system
- ✿ Clean, fresh tasting water

\* When used with Wellsys proprietary filtration



Now available with touchless-dispense options!




[www.wellsyswater.com](http://www.wellsyswater.com)

630 Allendale Road, Suite 200  
King of Prussia, PA 19406  
855.558.9796



Certified by IAPMO according to NSF/ANSI 372 for material safety.

# WS 9000CT Water Cooler

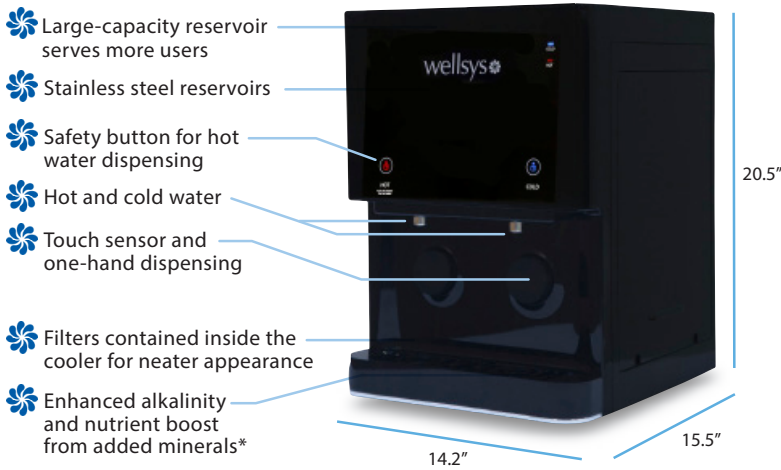


\* When used with Wellsys proprietary filtration

## Specifications

DESCRIPTION	SPECIFICATION
Weight	50 lbs
Dimensions	20.5" h x 14.2" w x 15.5" d
Colors	Black and white
Cold Tank Capacity	1.2 gallons (4.5 liters)
Hot Tank Capacity	.5 gallon (1.9 liters)
Dispense Height	7"
Recommended Water Pressure	60-70 psi
Rated Voltage/Frequency	110v/60Hz @ 4.9 amps
Power Consumption	1.60 kWh/24 hours

Manufactured in Korea

## Multi-Stage Purification Process

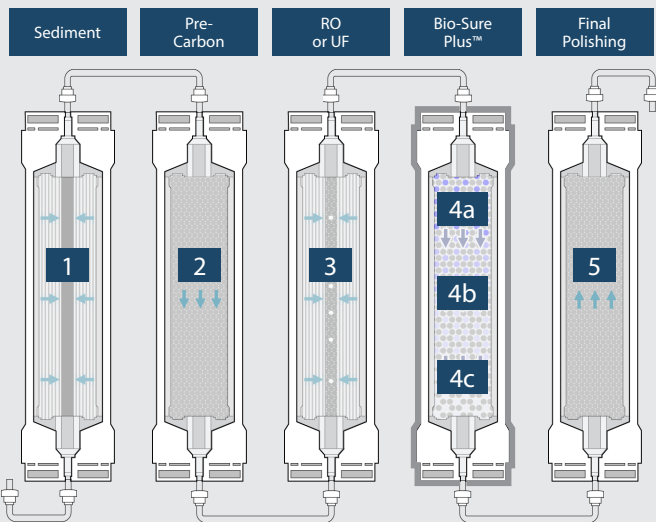

- 1 **Sediment Filter**  
Reduces particles such as dirt, silt, rust and pipe residue.
- 2 **Pre-Carbon Filter**  
Reduces chlorine, chemicals and pesticides.
- 3 **Reverse Osmosis (RO) or Ultra Filtration (UF) Membrane**  
Reduces such contaminants as solids, arsenic, pharmaceuticals, and metals.
- 4 **BIO-SURE PLUS™ FILTER**
  - 4a **Restores/Adds Minerals & Electrolytes**  
More than 20 minerals and electrolytes are added.
  - 4b **Enhances Alkalinity**  
Water is enhanced with minerals to increase alkalinity.
  - 4c **Cleans Water**  
Colloidal silver is used to maintain the cleanliness of the waterway.
- 5 **Final Polishing Filter**  
Coconut shell carbon polishes the water for great taste.



[www.wellsyswater.com](http://www.wellsyswater.com)

630 Allendale Road, Suite 200  
King of Prussia, PA 19406  
855.558.9796

© 2020 Wellsys. All rights reserved.



Certified by IAPMO according to NSF/ANSI 372 for material safety.